

KOBELCO

SK25SR-6E

SK25SR



Complies with the EU Stage V
exhaust emission regulation

We Save You Fuel
Achieving a Low-Carbon Society

Compact, Tough Performer



Mini excavators are widely used at sites where space is limited, such as residential areas and industrial operations. Users want big power in a small machine, stable operation, rugged construction and durability to reduce downtime. The SK25SR combines a compact design with efficiency, maneuverability and durability to ensure a long working life. Maintenance is easy, with the machine's running condition shown on an LCD monitor fitted as standard.

The SK25SR is a mini with big aspirations, designed and equipped for full-sized performance over an extended working life.

PERFORMANCE

Compact yet Big Performance

Reliable Swing Power, Faster Working Speed

Boosted swing power and a top-class swing speed deliver shorter cycle times.

Swing Speed: **10.0 min⁻¹**

Powerful Digging

For more efficient work performance.

Max. Arm Crowding Force: **14.7 kN**

Max. Bucket Digging Force: **24.5 kN**

Easy Hydraulic Piping for Quick Hitch

Piping for Quick Hitch is available as option.




Auto Deceleration (Option)



If the operating levers have been in neutral for more than 4 seconds, the engine will automatically drop back to idle, which lowers noise, emissions and fuel consumption.


Wide Working Range

The SK25SR has plenty of working ranges.

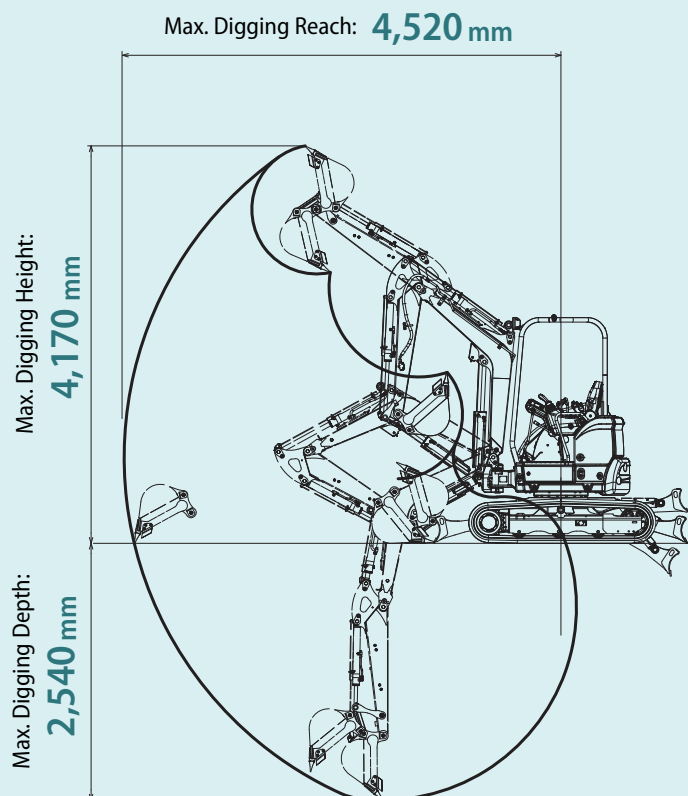

Backlit Liquid Crystal Monitor

The backlit liquid crystal monitor is provided as standard. Operation information as well as the full range of machine status information can readily be checked.

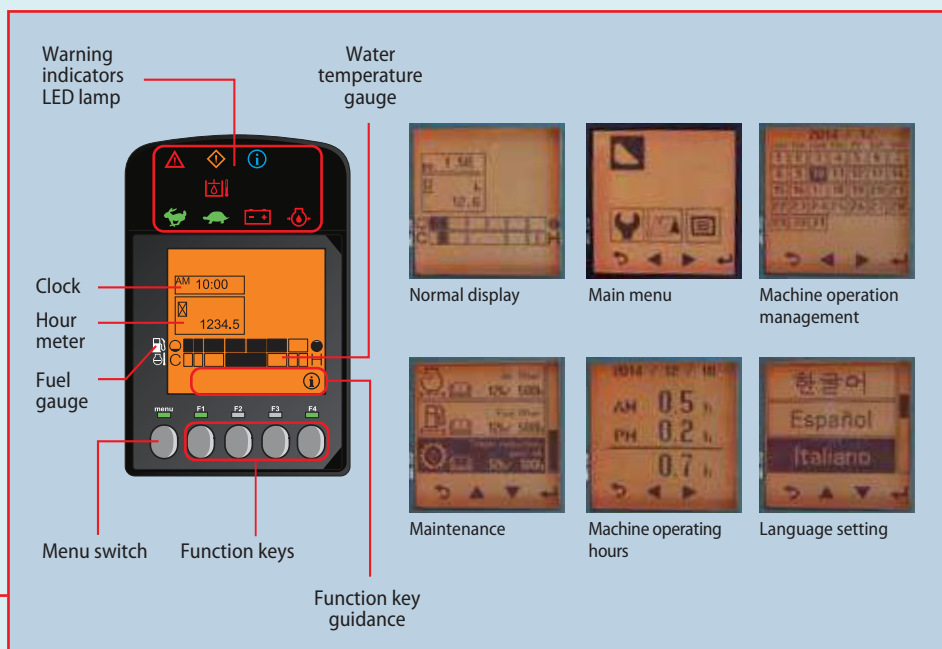

PERFORMANCE

Compact yet Big Performance

Short Tail Swing

The combination of side-ditch digging function and zero tail radius makes it easy to dig next to walls with a compact operating footprint.

Tail Overhang: **0mm**
(without rear view mirror)



Compact Upper Body Without Front Overhang




RELIABILITY

Reliable Construction

SK25SR has the durability needed in a machine that works in tight spaces.

Cylinder Rod Guard

The spring steel cylinder rod guard is standard for the bucket, boom and arm cylinder. The use of spring steel not only protects the cylinder rod, but gives resiliency to the guard itself.



Boom cylinder rod guard



Arm cylinder rod guard



Bucket cylinder rod guard



Work Light

Work light is mounted under the boom to protect from damage.



Blade Cutting Edge

Backfill dozer blade has wear-resistant cutting edge.

COMFORT

Comfortable Work Environment



Broader floor space gives operators plenty of foot room. Wide operational space is provided with more room between the left and right control consoles.

Storage Compartment for Manuals

A handy compartment in the seat-back holds manuals and other documents.



Wrist Rest

Wrist rests fitted on the each control lever box ensure fatigue-free operation.




Travel Pedal

The travel pedal simplifies simultaneous operations while the machine is traveling.




Comfortable Reclining Seat

Seat can be adjusted to match the operator's size or posture.



Easy Access to Control Panel and Levers

Centralized switches in a convenient position to allow for simple, convenient operation.

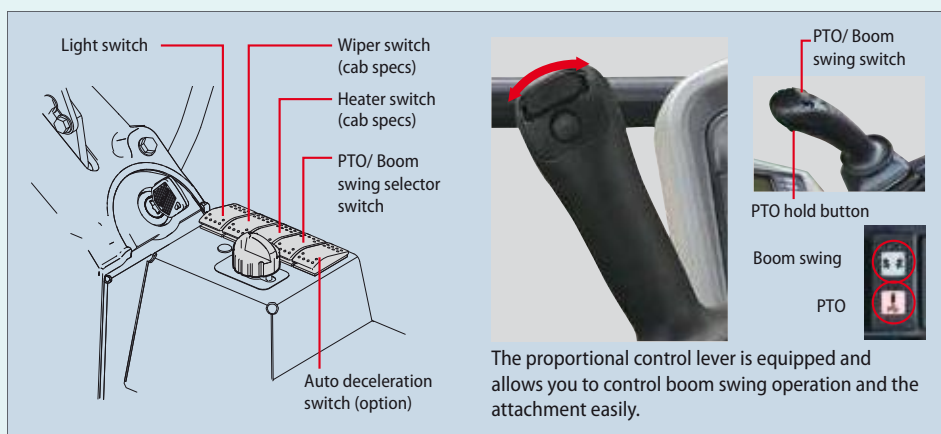


Operator Safety

Reliable Cab/Canopy Structure

The high-strength cab/canopy meets ROPS and TOP GUARD LEVEL 1 standards for greater operator safety.



Safety Lever Lock



Safety lever lock permits enter and exit only when the levers are disengaged to prevent accidental operation.

Travel Alarm



Travel alarm is available as an Option.

MAINTENANCE

Easy Maintenance

Easier maintenance, with a fully-opening engine hood and equipment that requires the most frequent checks positioned to be readily visible.



Easy Access to Engine Compartment



Water separator

Fuel filter

Radiator over flow bottle

Air cleaner

Under the Operator's Seat



Generator

Starter motor

Fuse box

Right Side



Fuel tank


Hydraulic tank

Battery

SPECIFICATIONS

GENERAL				
MODEL			SK25SR	
Type			SK25SR-6E	
PERFORMANCE				
Shoe Type			Rubber	Steel
Bucket Capacity			0.08	
Travel Speed (high/low)			4.5/2.8	
Swing Speed			10.0	
Gradeability			47 (30)	
Traction Force			24.4	26.7
Bucket Digging Force			24.5	24.5
Arm Crowding Force			14.7	14.7
WEIGHT				
Machine Mass	Cab	kg	2,670	2,780
	Canopy	kg	2,565	2,675
Ground Pressure	Cab	kPa	30.9	32.0
	Canopy	kPa	29.7	30.9
ENGINE				
Model			Yanmar 3TNV76-NBVA1	
Type			Water cooled, 4-cycle, 3-cylinder	
Power Output NET	(ISO9249)	kW/min ⁻¹ {rpm}	15.2/2,500	
Max. Torque NET	(ISO9249)	N·m/min ⁻¹ {rpm}	66.2/1,800	
Displacement			1.115	
Fuel Tank			30.5	
HYDRAULIC SYSTEM				
Pump			Two variable displacement pumps + two gear pumps	
Max. Discharge Flow			2 x 30.0, 21.3, 11.3	
Relief Valve Setting			2 x 20.6, 18.1, 2.9	
Hydraulic Oil Tank (system)			25 (39)	
DOZER BLADE				
Width x Height			1,500 x 295	
Working Ranges (height/depth)			340/355	
SIDE DIGGING MECHANISM				
Type			Boom swing	
Offset Angle	To the left	degree	47	
	To the right	degree	74	

WORKING RANGES

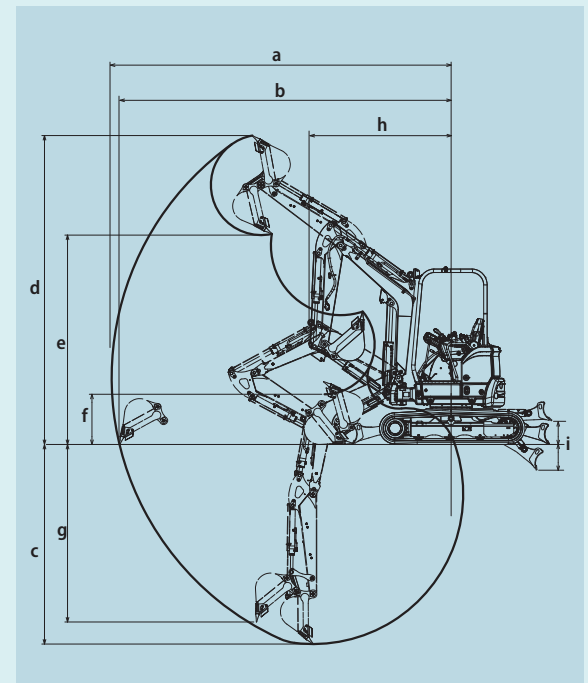


Unit: mm

MODEL	SK25SR
a- Max. digging reach	4,520
b- Max. digging reach at ground level	4,400
c- Max. digging depth	2,540
d- Max. digging height	4,170
e- Max. dumping clearance	2,780
f- Min. dumping clearance	950
g- Max. vertical wall digging depth	2,240
h- Min. swing radius	1,950
h- Min. swing radius at boom swing	1,650
i- Dozer blade (height/depth)	340/355

Figures for cab spec. and canopy spec. are the same value.

GENERAL DIMENSIONS

Unit: mm

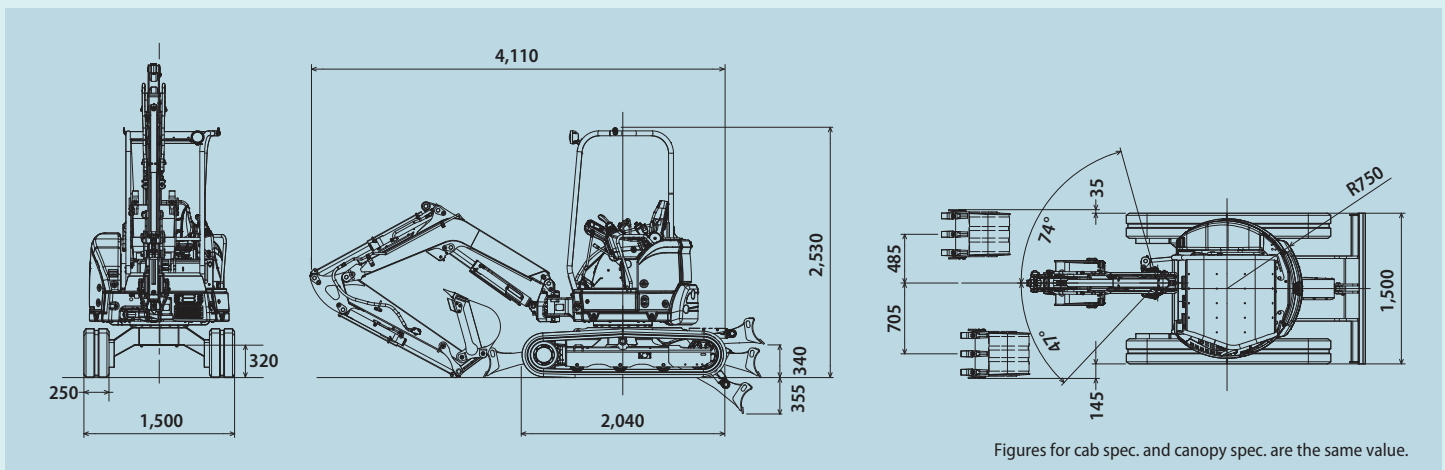


Figures for cab spec. and canopy spec. are the same value.

OPTIONAL EQUIPMENT

• Steel shoe • Quick Hitch piping • Long arm • Radio (only for cab) • Travel Alarm • Boom & arm holding valve

LIFTING CAPACITIES











Rating over front



Rating over side or 360 degrees

A: Reach from swing centerline to arm top
B: Arm top height above/below ground
C: Lifting capacities in kilograms
Shoe: Rubber shoe Dozer blade: Up
Relief valve setting: 20.6 MPa

SK25SR		Bucket: Without Rubber Shoe: 250 mm								
A \ B		2.0 m		2.5 m		3.0 m		At. Max. reach		Radius
										
3.0 m	kg			*450		*530	*520	*530	*520	3.02 m
2.5 m	kg			*470		*500	*490	*520	390	3.39 m
2.0 m	kg			*550	*550	*530	*520	400	340	3.62 m
1.0 m	kg	1,000	790	700	570	520	430	350	300	3.81 m
G. L.	kg	870	710	620	510	480	420	360	300	3.67 m
-1.0 m	kg	840	690	610	500	470	390	440	370	3.13 m
-1.5 m	kg	890	700	*650	510			580	490	2.61 m

Notes:

1. Do not attempt to lift or hold any load that is greater than these lift capacities at their specified lift point radius and heights. Weight of all accessories must be deducted from the above lift capacities.
2. Lift capacities are based on machine standing on level, firm, and uniform ground. User must make allowance for job conditions such as soft or uneven ground, out of level conditions, side loads, sudden stopping of loads, hazardous conditions, experience of personnel, etc.
3. Arm top defined as lift point.

4. The above lifting capacities are in compliance with ISO 10567. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Lifting capacities marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.
5. Operator should be fully acquainted with the Operator's and Maintenance Instructions before operating this machine. Rules for safe operation of equipment should be adhered to at all times.
6. Lift capacities apply to only machine as originally manufactured and normally equipped by KOBELCO CONSTRUCTION MACHINERY CO., LTD.

Note: This catalog may contain attachments and optional equipment that are not available in your area. And it may contain photographs of machines with specifications that differ from those of machines sold in your area. Please consult your nearest KOBELCO distributor for those items you require.
Due to our policy of continuous product improvements all designs and specifications are subject to change without advance notice.
Copyright by **KOBELCO CONSTRUCTION MACHINERY CO., LTD.** No part of this catalog may be reproduced in any manner without notice.

Kobelco Construction Machinery Europe B.V.

Veluwezoom 15
1327 AE Almere
The Netherlands
www.kobelco-europe.com

Inquiries To: